



Sample Preparation Saws



Tile Saw

Notch cuts made Easy!

- MK Diamond MK-101 Pro
- Features 0.050" thick 10" blade to meet test standard notch cut thickness requirements
- Custom spring clamp fixture mounted to back of table for quick and secure sample loading
- Includes spacer blocks to allow cutting SCB (15mm default) and DCT specimen notch cut without adjusting the blade
- Make SCB half cuts and DCT flat cuts too
- Includes machined spacer blocks for spot checking blade alignment
- LSU SCB (ASTM D8044) spacer blocks available

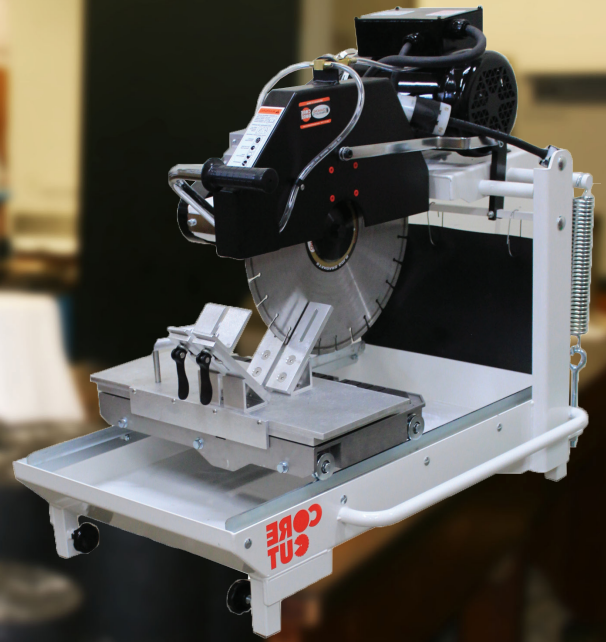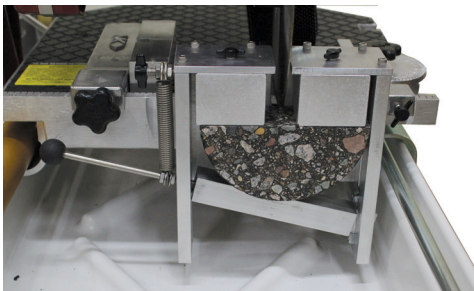

Brick Saw

Disc cuts made Easy!

- Diamond Products CC500M XL-II
- Customized with 16" blade for 6" cuts
- Operates on 230VAC or 120VAC
- Custom fixture mounted to second stand-alone table; keeping original table for other cutting
- Fixture holds specimens 4" to 6" in diameter
- Once the specimen is inserted, simply slide the table left or right in the preconfigured thickness offsets (50mm and 62mm default)

